


## ZÁKLADNÍ ÚDAJE TEPLOVODNÍCH KOTLŮ NOX

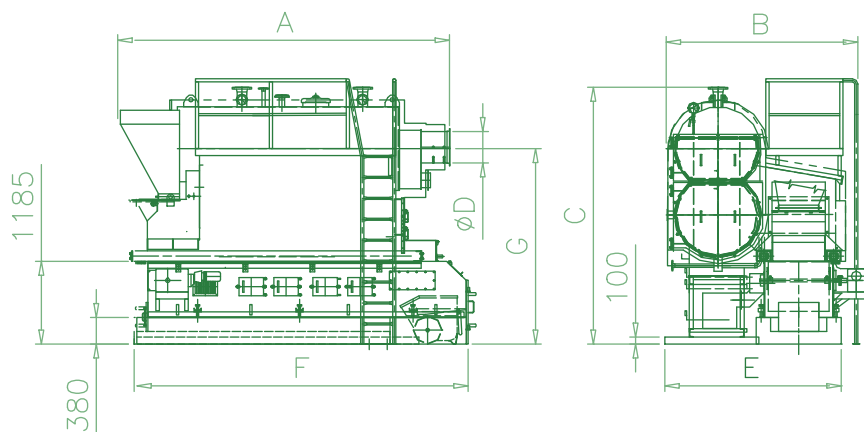

### Technické parametry

TYP KOTLE	VÝKON kW	JMEN. TLAK bar	ÚČINOST OST %	SPOTŘEBA PALIVA kg/h	OBSAH NASYPKY LITRŮ	HMOTNOST PROVOZNÍ kg
NOX V 300 U	300	4/6/1	80	76	400	6600
NOX V 500 U	500	4/6/1	80	125	600	8500
NOX V 700 U	700	4/6/1	80	180	750	11150
NOX V 1000 U	1000	4/6/1	80	255	1000	13100
NOX V 1200 U	1200	4/6/1	80	310	1200	15000
NOX V 1400 U	1400	4/6/1	80	355	1250	16250
NOX V 1700 U	1700	4/6/1	80	430	1400	17450
NOX V 3000 U	3000	4/6/1	80	760	1700	25300

### Rozměry (mm)

TYP KOTLE	A	B	C	D	E	F	G
NOX V 300 U	3380	2100	3150	225	1700	3620	2300
NOX V 500 U	3810	2400	3360	280	2040	4000	2500
NOX V 700 U	4100	2630	3600	355	2350	4300	2750
NOX V 1000 U	4580	2680	3680	450	2485	4600	2800
NOX V 1200 U	4650	2770	3800	500	2550	4600	2900
NOX V 1400 U	4680	2880	3900	500	2670	4700	3020
NOX V 1700 U	4910	3080	3980	560	2880	4950	3100
NOX V 3000 U	6730	4030	4410	710	2960	6080	3310