


ZÁKLADNÍ ÚDAJE PARNÍCH KOTLŮ NOX

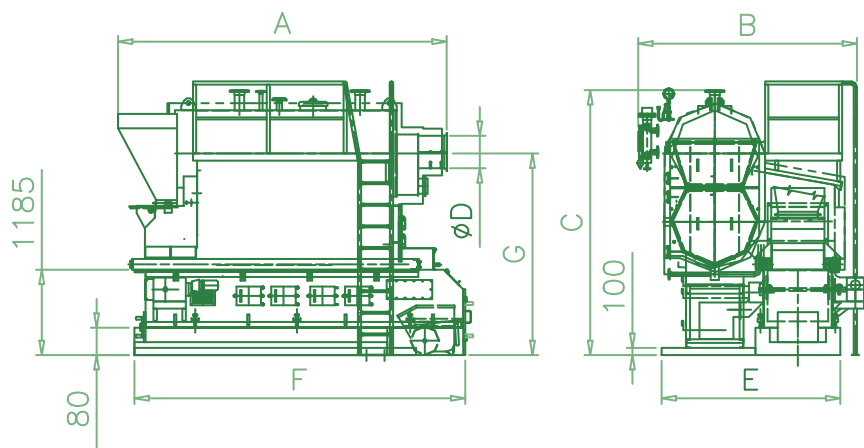

Technické parametry

TYP KOTLE	VÝKON kW	VÝKON PARNÍ t/h	JMEN. TLAK bar	ÚČINOST OST %	SPOTŘEBA PALIVA kg/h	OBSAH NASYPKY LITRŮ	HMOTNOST PROVOZNÍ kg
NOX S 300 U	300	0,42	8/12	80	80	400	6700
NOX S 500 U	500	0,70	8/12	80	132	600	8900
NOX S 700 U	700	1,00	8/12	80	185	750	11500
NOX S 1000 U	1000	1,40	8/12	80	265	1000	13900
NOX S 1200 U	1200	1,68	8/12	80	320	1200	15450
NOX S 1400 U	1400	1,96	8/12	80	370	1250	17050
NOX S 1700 U	1700	2,38	8/12	80	450	1400	18450
NOX S 3000 U	3000	4,40	8/12	80	790	1700	28500

Rozměry (mm)

TYP KOTLE	A	B	C	D	E	F	G
NOX S 300 U	3380	2460	3150	225	1700	3620	2300
NOX S 500 U	3810	2750	3360	280	2040	4000	2500
NOX S 700 U	4100	3000	3600	355	2350	4300	2750
NOX S 1000 U	4580	3050	3680	450	2485	4600	2800
NOX S 1200 U	4650	3120	3800	500	2550	4600	2900
NOX S 1400 U	4680	3240	3900	500	2670	4700	3020
NOX S 1700 U	4910	3450	3980	560	2880	4950	3100
NOX S 3000 U	6730	4400	4410	710	2960	6080	3310